

# Smarty S-03

**MADS** - Micro Tuner model S-03  
1998 – 2002 Dodge Ram  
5,9L 24 Valves Cummins Diesel Engine

Instruction Manual



**PLEASE READ THIS ENTIRE INSTRUCTION MANUAL BEFORE PROCEEDING**

[www.madselectronics.com](http://www.madselectronics.com)

*Rev. 1.24A*

**THIS IS A HIGH PERFORMANCE PRODUCT USE AT YOUR OWN RISK**

**This product is intended for OFF ROAD USE ONLY  
This product is not intended to be used to break the law**

Do not use this product until you have read the following agreement.

This agreement sets forth the terms and conditions for the use of this product.

**The installation of this product indicates that the buyer has read and understands this agreement and accepts the terms and conditions.**

**DISCLAIMER OF LIABILITY**

MADS, its distributors, jobbers and dealers ( hereafter Seller ) shall be in no way responsible for the product's proper uses and service. THE BUYER HEREBY WAIVES ALL LIABILITY CLAIMS.

The buyer acknowledges that he is not relying on the Sellers skill or judgement to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the buyer hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise ( including without any obligation of the seller with respect fitness, merchantability and consequential damages ) whatever or not occasioned by the sellers negligence.

The Seller disclaims any warranty and expressly disclaims any liability for personal injury and damages. The buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the buyer agrees to indemnify the Seller and to hold the Seller harmless from any claim related to the item of the equipment purchased. Under no circumstances will the seller be liable for any damages or expenses by reason of use or sale of any such equipment.

The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and in doubt contact the manufacturer.

The buyer is solely responsible for all warranty issues from the manufacturer.

**LIMITATION OF WARRANTY**

MADS ( Hereafter Seller ) gives Limited Warranty as to description, quality, merchantability, and fitness for any particular purpose, productiveness, or any other matter of the Seller's product sold herewith. The Seller shall be in no way responsible for the products proper use and service and the buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except to be a written instrument signed by Seller and Buyer.

The warranty is limited to one ( 1 ) year from the date of sale and limited solely to the parts contained within the products kit. All products that are in question of warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by MADS.

Under no circumstances will the Seller be liable for any labor charged or travel time incurred by in diagnosis for defects, removal, or reinstallation of this product or any other contingent expenses.

Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment.

In the event that the buyer does not agree with this agreement: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE TO THE PLACE OF PURCHASE WITHIN TEN (10) DAYS FROM THE DATE OF PURCHASE FOR A FULL REFUND.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS THE TERMS AND CONDITIONS.

## CAUTION

This *MADS* product is intended for use on unmodified stock engines. Remove any performance enhancing electronic devices and make sure the ECM has been returned to STOCK if you have used another manufacturer's programmer before the Smarty Micro Tuner.

The use to change the performance characteristics of your vehicle could invalidate the warranty provided by the vehicle manufacturer. Consult your vehicle warranty before using the product on your vehicle.

**NEVER CONNECT BOTH THE SMARTY CONNECTORS AT THE SAME TIME!**

This could damage Smarty and the computer USB port.

It is recommended that you not store your Smarty Micro Tuner in your vehicle if ambient temperatures in your area fall below 32°F. Excessively low temperatures can cause malfunction or damage to Smarty Micro Tuner that is not covered by the *MADS* warranty.

In the case of ECM replacement, restore the ECM back to the STOCK software before the ECM replacement. Smarty works only with one vehicle and one ECM at a time while it is VIN Locked. Under no circumstances we will refund, repair, or warranty units that are send in and result VIN # locked.

---

**RESTORE ECM TO STOCK SOFTWARE BEFORE ANY SERVICE ASSISTANCE.**

If you need to return your vehicle to a service center, restore the vehicle ECM updating to STOCK software following the instruction described below. The service center might reprogram your vehicle with an updated STOCK software without your knowledge. If your vehicle has not been returned to its STOCK software prior service, the Smarty Micro Tuner will no longer be able to program your vehicle. Such failure is not covered by the *MADS* warranty.

Under no circumstances will we refund, repair, or warranty units that are send in and result VIN # locked.

---

# Index

---

<b>1.Before You Begin.....</b>	<b>5</b>
Your vehicle's STOCK program.....	5
Service Centers.....	5
Vehicle preparation.....	5
Smarty preparation.....	5
<b>2.Smarty Overview.....</b>	<b>5</b>
Keyboard operation.....	5
Connectors.....	5
<b>3.Connecting Smarty to your vehicle.....</b>	<b>6</b>
<b>4.Updating the ECM.....</b>	<b>6</b>
First time update.....	6
Other updating.....	7
Recovery of the ECM .....	9
<b>5.Adjusting optional parameters.....</b>	<b>11</b>
Speed limiter.....	11
Torque.....	11
Injection Timing.....	11
Injection Duration.....	11
<b>6.Reading DTC's.....</b>	<b>11</b>
Reading Diagnostic Trouble Codes.....	11
Clearing DTC codes.....	12
<b>7.ABS Update.....</b>	<b>12</b>
Tire height update.....	12
<b>8.Appendix A: Error messages description.....</b>	<b>14</b>
<b>9.Appendix B: DTC codes Interpretation.....</b>	<b>15</b>
Regarding DTC Interpretation.....	15
DTC Interpretation listing.....	16
<b>10.Warranty.....</b>	<b>20</b>
<b>11.Declaration of Conformity.....</b>	<b>20</b>

## 1. Before You Begin

### Your vehicle's STOCK program

Your vehicle ECM must contain the manufacturer's STOCK factory program. If you have used a programmer from another aftermarket company you must use their product to return your ECM back to STOCK condition before proceeding. If you have a performance-enhancing device installed, it must be removed.

### Service Centers

If you need to return your vehicle to a service center, restore the vehicle ECM updating to STOCK software following the instruction described below. The service center might reprogram your vehicle with an updated STOCK software without your knowledge. If your vehicle has not been returned to its STOCK software prior service, the Smarty Micro Tuner will no longer be able to program your vehicle. Such failure is not covered by the *MADS* warranty.

Under no circumstances will we refund, repair, or warranty units that are send in and result VIN # locked

### Vehicle preparation

Before connecting the Smarty Micro Tuner to your vehicle, make sure that all power-draining accessories are turned off: Radio, headlights, lights, cell phones, etc. All those devices need to be turned off. Please apply the parking brake before you begin a download.

As the Smarty Micro Tuner needs full battery voltage to program, ensure your vehicle battery is fully charged and NOT connected to a battery charger.

Do not disturb or remove the connection cable during the updating operation.

### Smarty preparation

During the first use, Smarty reads and stores the identification parameters of your vehicle. After the first use Smarty becomes "VIN # locked" and can be used only with your vehicle.

Returning your vehicle to STOCK software restores Smarty into the original, unlocked condition.

## 2. Smarty Overview


### Keyboard operation

Smarty's keyboard is composed of 12 keys:

- Numerical keys from 0 to 9, used to select menu options and enter numerical values
- Right arrow key, used to confirm the selected operation
- Left arrow key, used to go one step back in the operation flow

### Connectors

Two connectors are available in Smarty's upper side:

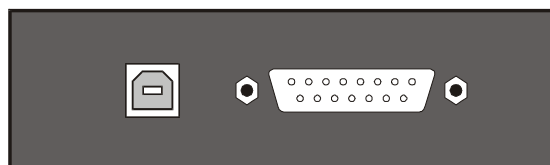

USB ECM Cable

- USB: used to connect a personal computer for updates to Smarty's database. The update softwares can be downloaded from *MADS* internet site ([www.madselectronics.com](http://www.madselectronics.com)) when they become available. USB cable is not included. Standard USB 1.1 or USB 2.0 cables can be used to connect Smarty to your personal computer.
- 15 pin connector for the OBD II cable; used to connect the vehicle through the diagnostic connector placed below the driving wheel.

The OBD II – J1926 diagnostic connector cable is included in Smarty's box. Connecting other cables to the cannon 15 pin connector invalidate *MADS* warranty, because it could damage Smarty.

Smarty automatically switches on when connecting one of the 2 above described connectors. NEVER CONNECT BOTH THE CONNECTORS IN THE SAME MOMENT. This could damage Smarty and the computer USB port. Such failure is not covered by the *MADS* warranty

### 3. Connecting Smarty to your vehicle

Turn on the ignition key. DO NOT START THE ENGINE.

Plug the dedicated cable to the 15 pin connector in the top side of Smarty and block the security screws by hand.

Plug the Smarty cable into the diagnostic connector of your vehicle.

### 4. Updating the ECM

#### First time update

Turn on the ignition key. DO NOT START THE ENGINE.

Plug the Smarty cable into the diagnostic connector of your vehicle. Smarty will display:

```
Smarty
V:1.00A D:2.00A
```

The second line of the display shows the firmware version and the tuning data version.

Both the internal firmware and the tuning data information can be updated connecting a personal computer. See *MADS* internet site for more details. Then main menu appears:

```
1=ECM Update
2=Read DTC codes
```

From the main menu, press '1' to select *ECM Update*.

Press the '1' key to select *ECM Update*.

Then the Options menu appears:

```
1=Connect Truck
2=Adjust options
```

From the Options menu, press '1' to select Connect Truck.

Smarty will try to communicate with the ECM. If the connection cannot be established, Smarty asks you to switch off the ignition key:

```
Turn key OFF
Press '>'
```

Pressing the '>' key, Smarty asks to switch on the ignition key to retry the connection:

```
Turn key ON
Press '>'
```

When the connection has been established, Smarty shows the current installed software. During the first updating, the following page will appear:

```
Present SW:STOCK
Press '>'
```

The first time you update the ECM of your vehicle, Smarty reads the serial number of your vehicle, the serial number of your ECM, and stores them into its onboard memory for future use. From this moment on, Smarty will work only with your vehicle until it's restored back to the stock settings. Returning to STOCK software, Smarty restores itself to the original, unlocked condition.

When the '>' key has been pressed, Smarty asks you to select one of the CaTCHER softwares to be load into the ECM:

```
Choose CaTCHER
Press a # key
```

You can choose among TEN different CaTCHER softwares according to the requested performance. Any key, from 0 to 9, can be pressed.

Smarty asks you to confirm the selection before he downloads the new software into the ECM:

```
Program SW: 5
Press '>'
```

You can return back one step, in any moment with the '<' key.

Pressing '>' (or if the key '2' has been pressed in the previous menu) the updating session starts. You will see the following page:

```
PROGRAMMING
Please wait
```

After a few seconds, an up-counter with the percentage of the transmitted software will appear. At the end of transmission (when 100% is reached) Smarty will update the functional parameters of the ECM. A typical download time is two minutes.

The following page will appear:

```
Updating ECM
Please wait
```

At the end of the updating session, the following page appears:

```
UPDATE DONE
```

After a few seconds Smarty displays the following page:

```
Unplug Smarty
Turn key OFF
```

Please, unplug Smarty from the diagnostic port and turn the Key of for 30 seconds.

*Remember to restore the STOCK software before returning your vehicle to a service center. The service center might reprogram your vehicle with an updated STOCK software without your knowledge. If your vehicle has not been returned to its STOCK software prior service, Smarty will no longer be able to program your vehicle. Such failure is not covered by the MADS warranty. Under no circumstances will we refund, repair, or warranty units that are send in and result VIN # locked.*

## Other updating

Once you have loaded a CaTCHER software in the ECM of your vehicle, Smarty is VIN Locked. This means that Smarty will work only in your vehicle.

(Returning the ECM to STOCK software, Smarty restores itself to the original, unlocked condition.)

Turn on the ignition key. DO NOT START THE ENGINE. Plug Smarty's cable into the diagnostic connector of your vehicle and Smarty will display:

```
#   Smarty   #
V:1.00A  D:2.00A
```

When the “#” symbols are displayed on the first line, Smarty is VIN# locked to a vehicle. The second line of the display shows the firmware version and the tuning data version.

Both the internal firmware and the tuning data information can be updated connecting a personal computer when updates become available. See *Updating Smarty* chapter for more details.

After a few seconds the main menu will appear:

1=ECM/ABS Update 2=Read DTC codes
--------------------------------------

Once Smarty is VIN# Locked, the ABS control system can be accessed in order to correct the wheel height.

Pressing the '1' key, a second menu appears:

1=ECM Update 2=ABS Update
------------------------------

Press '1' to select *ECM Update*.

Then the Options menu appears:

1=Connect Truck 2=Adjust options
-------------------------------------

From the Options menu, press '1' to select Connect Truck.

Smarty will try to communicate with the ECM. If the connection cannot be established, Smarty asks you to switch off the ignition key:

Turn key OFF Press '>'
---------------------------

Pressing the '>' key, Smarty asks to switch on the ignition key to retry the connection:

Turn key ON Press '>'
--------------------------

When the connection has been established, Smarty shows the currently installed software.

After the first update, the following page will appear displaying the CaTCHER software currently installed in the ECM:

Present SW: 5 Press '>'
----------------------------

When the '>' key has been pressed, Smarty asks for the selection between the STOCK and the CaTCHER software:

1=CaTCHER SWs 2=Stock SW
-----------------------------

Pressing the '2' key, Smarty asks for the confirmation of the operation of restore:

Program STOCK SW Press '>'
-------------------------------

Pressing the '>' key, the ECM is restored to STOCK and Smarty returns to original, unlocked condition, so it can be used with another vehicle.

Pressing the '1' key in the above described menu, Smarty asks for the selection of the CaTCHER software to be loaded into the ECM:

Choose CaTCHER Press a # key
---------------------------------

You can choose among 10 different CaTCHER softwares according to the requested performance. Any key, from 0 to 9, can be pressed.

Smarty asks you to confirm the selection before he downloads the new software into the ECM:



Program SW: 5  
Press '>'

You can return back one step, in any moment with the '<' key.  
Pressing '>' (or if the key '2' has been pressed in the previous menu) the updating session starts.  
You will see the following page:

PROGRAMMING  
Please wait

After a few seconds, an up-counter with the percentage of transmitted software will appear.  
At the end of transmission (when the 100% is reached) Smarty will update the functional parameters of the ECM. The following page will appear:

Updating ECM  
Please wait

At the end of the updating session, the following page appears:

UPDATE DONE

After a few seconds Smarty displays the following page:

Unplug Smarty  
Turn key OFF

Please, unplug Smarty from the diagnostic port and turn the Key of for 30 seconds.

## Recovery of the ECM

If an interruption occurs during an Update or the Update operation is terminated before the normal end for any reason the ECM will not be operational. You must recover the ECM using Smarty to resume the update process.

Attention! The engine will not start before the ECM has been recovered properly!  
( The Wait to Start Light will flash continuously )

DON'T PANIC!

MADS has developed a special boot loader software that is used during all the ECM Updates. Unlike the OEM DRBIII tool, there's no need to pull fuses or unplug the batteries! No tools needed! At MADS we've done our homework!

Just follow the directions on Smarty's display.  
Smarty will handle the situation for you in a few simple steps.  
Unplug Smarty, then plug it in again. After a few seconds the usual main menu will appear.

1=ECM/ABS Update  
2=Read DTC codes

Pressing the '1' key, the second menu appears:

1=ECM Update  
2=ABS Update

Press '1' to select *ECM Update*.  
Then the Options menu appears:

1=Connect Truck  
2=Adjust options

From the Options menu, press '1' to select Connect Truck.

Smarty will try to establish the communication with the ECM. The connection cannot be established because the last updating session has been interrupted. Smarty knows that the last update has not been performed correctly thus he's able to recognise the not operational ECM condition.

Smarty asks you to turn OFF the ignition key:

Turn key OFF  
Press '>'

Pressing the '>' key, Smarty asks you then to turn ON the ignition key to retry the communication:

Turn key ON  
Press '>'

Press the '>' key.

The communication cannot start yet. Smarty shows the following message:

A previous update has been interrupted  
Press '>' to restore ECM to Stock

The message is longer than the physical display, so it rotates continuously.

Pressing '>' the recovery operation starts. You will see the following page:

PROGRAMMING  
Please wait

After a few seconds, an up-counter with the percentage of the transmitted software will appear.

At the end of the transmission (when the 100% is reached) Smarty will update the functional parameters of the ECM. The following page will appear:

Updating ECM  
Please wait

At the end of the recovery operation, the following page appears:

UPDATE DONE

After a few seconds Smarty displays the following page:

Unplug Smarty  
Turn key OFF

The job is done. The ECM has been returned to the STOCK condition and Smarty is no longer VIN# Locked. You're ready to start from the beginning again.

## 5. Adjusting optional parameters

Before the programming, Smarty proposes the adjustment of the optional parameters.

To enter this function, press 2 in the Options menu:

```
1=Connect Truck
2=Adjust options
```

The list of optional parameter varies according to the installed software.

For each parameter, the current option status is shown on the first line of the display. With Smarty numeric keyboard, the optional parameters can be adjusted.

To maintain unchanged the current parameter, press the '>' key.

You can return back one step, in any moment with the '<' key.

### Speed limiter

The speed limiter can be adjusted anywhere from 25 to 250 MPH in one MPH steps.

NOTE: only 2001 and 2002 trucks the speed limit value is the real MPH speed. In older trucks, the speed limit is only a speed factor that compensate the maximum speed.

#### IMPORTANT NOTICE

Your tires might not be rated for increased speeds. Please check your tires rating!

```
Speed lim=Stock
New lim=
```

To set the speed limiter to Stock, select 0.

### Torque

The Torque selection can be programmed with a value between 1 (stock) and 6 (high). To use the default torque setting for the current CaTCHER level, press 0.

```
Torque=Default
New T.=
```

### Injection Timing

The Timing selection can be programmed 1 (stock), 2 (advanced), 3 (moderate) or 4 (wild). To use the default timing setting for the current CaTCHER level, press 0.

```
Timing=Default
New T.=
```

### Injection Duration

The Duration selection can be programmed with a value between 1 (stock) and 5 (high). To use the default duration setting for the current CaTCHER level, press 0.

```
Duration=Default
New D.=
```

## 6. Reading DTC's

### Reading Diagnostic Trouble Codes

From the main menu, press the '2' key to select this function.

```
1=ECM/ABS Update
2=Read DTC codes
```

Smarty will try to establish the communication with the ECM.

If the Key was not turned into the on position Smarty will display this message:

Turn key OFF  
 Press '>'

Pressing the '>' key, Smarty asks you to turn on the ignition key to retry the connection:

Turn key ON  
 Press '>'

When the connection has been established, if no DTC codes are present, the following page appears:

No DTC stored  
 Press '>'

If one or more DTC's are stored, Smarty shows the number of DTC's present with the following page:

8 DTC present  
 Press '>'

With the keys '<' and '>' all the present DTC codes can be displayed, one code at a time with the following page:

DTC #1 – P0237  
 MAP sensor volta

The first line of display shows the DTC "P" code. The second line shows the DTC code description. If the DTC code description is longer than the physical dimension of the display, the description rotates continuously.

Some DTC codes could have no description. In that case, the message "See documentat." Appears. See appendix B of this manual for a complete listing of the DTC codes.

## Clearing DTC codes

At the end of the visualisation of the last DTC code present, Smarty propose to clear all the stored DTC codes from the ECM memory:

1=Clear DTC  
 2=Exit

Pressing the '1' key, all the DTC codes stored in the ECM memory are erased.

Pressing the '2' key, the DTC's will not be erased.

When the erasing operation has been completed, the following page appears:

DTC Cleared  
 Press '>'

## 7. ABS Update

### Tire height update

Once Smarty is VIN# Locked (i.e. a CaTCHER software has been loaded in the ECM) the speedometer of the vehicle can be adjusted according to the tire height.

To update the tire height you have to choose the ABS update function in the main menu:

1=ECM/ABS Update  
 2=Read DTC codes

Pressing the '1' key, the second menu appears:

1=ECM Update  
 2=ABS Update

Pressing the '2' key, Smarty will try to establish the communication with the ABS.  
If the Key was not turned into the on position Smarty will display this message:

```
Turn key OFF
Press '>'
```

Pressing the '>' key, Smarty asks you to turn on the ignition key to retry the connection:

```
Turn key ON
Press '>'
```

When the connection has been established, Smarty shows the current tire height with the following page:

```
Curr.Tire:40.00"
New Tire: . . "
```

You can type in the correct tire height with the numerical keys.  
Any tire height from 25.00" to 45.00" can be chosen in 0.25" increments.  
As usual, with the '<' key, Smarty returns back one step, so you can eventually correct the input datum.

When you have inserted the correct tire height, Smarty asks the confirmation to proceed with the ABS programming with the following page:

```
New Tire:42.25"
Press '>' to start
```

With the '<' key, Smarty returns back one step, so you can eventually correct the input.

Pressing '>' key, Smarty updates the ABS unit with the new tire height.

A typical ABS programming takes not more than a couple seconds.

When the operation has been successfully completed, the following page appears:

```
PROGRAM DONE
```

Hint: it seems that the programming of the ABS units cannot always be performed. We have found quite often that the ABS sends the positive response for the new programming but in reality it didn't execute it. For this reason, Smarty shows the current tire height after the programming too. So you can verify the operation and, eventually, try again. Smarty already tries to take care of that problem by programming up to three times the ABS with the requested value. If the ABS still does not take the programming after those attempts, please try again.

For this reason Smarty requests the current tire height again from the ABS unit and the following page is shown:

```
Curr.Tire:42.25"
Press '>'
```

If the '<' key is pressed, the ABS update function can be repeated.

Pressing the '>' key, the following page is shown:

```
Unplug Smarty
Turn key OFF
```

Hint: How accurate is the ABS? During our testing we have often found that it is not very accurate. On our personal test truck with 33" tires we need to set the ABS to 32" for accurate Speed and odometer readings. Please check with a GPS.

## 8. Appendix A: Error messages description

This section contains all the possible error messages shown by Smarty:

Error message	Cause	Solution
CCD ERROR #	The communication with ABS unit doesn't work	Check connection cable or check ABS unit
COMM. TIME OUT	The ECM of the vehicle doesn't answer to Smarty	Turn the ignition key on (DO NOT START ENGINE) or Check the connection cable
ECM Changed	The ECM unit of the vehicle has been changed	Restore the original ECM back to STOCK before changing ECM
Empty Memory, Please Update	The last Update operation (through USB port) has been unsuccessfully completed. Smarty memory has been corrupted.	Repeat the Update operation. The data files are available on the MADS internet site.
INTERNAL ERROR #	Smarty internal malfunction	Call MADS assistance
Memory Error	A malfunction in the Smarty's memory	Call MADS assistance
Memory Written Wrong Data File	The update file transmitted to Smarty through USB port is corrupted	Download again the update file from MADS internet site and update Smarty with the correct file
PROGRAM ABORTED	The ECM update function has been interrupted	Restore the ECM to STOCK with the recovery procedure.
S/N Verify Error	The serial number of your vehicle has not been verified	Check connection cable
SW Version doesn't Match S/N	The ECM software version doesn't match with the serial number	Please contact MADS or the seller.
UNKNOWN SOFTWARE	Your vehicle contains a software version unknown to Smarty	Please contact MADS or the seller.
VIN# Locked	Smarty has been connected to a different vehicle	Restore the original vehicle back to STOCK before connecting Smarty to a new vehicle
WRONG COMMUNIC.	The communication between Smarty and the ECM unit is disturbed	Check the connection cable or the battery charge level
WRONG VIN#	The serial number of your vehicle is not valid	Wait 30 seconds with the ignition key on and try again

## 9. Appendix B: DTC codes Interpretation

The DTC (Diagnostic Trouble Code) reader function present in Smarty Micro Tuner is for convenience purpose only. Industry standard interpretation tables are supplied below. MADS makes no warranty of the correctness of the interpretations.

### Regarding DTC Interpretation

SAE Code Sections:

- P00xx Fuel & Air metering, Auxiliary emission controls
- P01xx Fuel & Air metering
- P02xx Fuel & Air metering
- P03xx Ignition & Firing systems
- P04xx Auxiliary emission controls
- P05xx Vehicle speed, Idle control & Auxiliary inputs
- P06xx Computer & Auxiliary outputs
- P07xx Transmission
- P08xx Transmission
- P09xx Transmission

Manufacturer Code Sections:

- P10xx Fuel & Air metering, Auxiliary emission controls
- P11xx Fuel & Air metering
- P12xx Fuel & Air metering
- P13xx Ignition & Firing systems
- P14xx Auxiliary emission controls
- P15xx Vehicle speed, Idle control & Auxiliary inputs
- P16xx Computer & Auxiliary outputs
- P17xx Transmission
- P18xx Transmission
- P19xx Transmission

Many logged codes are transitory, they are automatically reset.

DTC P1000 is an indication that the vehicle needs to be driven for a period so that the vehicle can learn certain operating characteristics and it will reset automatically. This code cannot be cleared externally.

## DTC Interpretation listing

P0016-CRANKSHAFT / CAMSHAFT TIMING MISALIGNMENT  
 P0030-1/1 O2 SENSOR HEATER RELAY MALFUNCTION  
 P0036-1/1 O2 SENSOR HEATER RELAY MALFUNCTION  
 P0071-AMBIENT AIR TEMPERATURE SENSOR PERFORMANCE  
 P0072-AMBIENT AIR TEMPERATURE SENSOR CIRCUIT LOW  
 P0088-FUEL RAIL PRESSURE SIGNAL IS ABOVE MAX LIMIT  
 P0101-MAF SENSOR PERFORMANCE  
 P0102-MAF SENSOR LOW FREQUENCY  
 P0103-MAF SENSOR HIGH FREQUENCY  
 P0106-BAROMETRIC PRESSURE OUT OF RANGE  
 P0107-MAP SENSOR VOLTAGE TOO LOW  
 P0108-MAP SENSOR VOLTAGE TOO HIGH  
 P0111-INTAKE AIR TEMP PERFORMANCE  
 P0112-INTAKE AIR TEMP SENSOR VOLTAGE TOO LOW  
 P0113-INTAKE AIR TEMP SENSOR VOLTAGE TOO HIGH  
 P0116-ENGINE COOLANT TEMPERATURE SENSOR CIRCUIT PERFORMANCE  
 P0117-ENGINE COOLANT TEMPERATURE (ECT) SENSOR VOLTAGE TOO LOW  
 P0118-ENGINE COOLANT TEMPERATURE (ECT) SENSOR VOLTAGE TOO HIGH  
 P0121-TP SENSOR VOLTAGE DOES NOT AGREE WITH MAP  
 P0122-THROTTLE POSITION SENSOR VOLTAGE TOO LOW  
 P0123-THROTTLE POSITION SENSOR VOLTAGE TOO HIGH  
 P0125-INSUFFICIENT COOLANT TEMP FOR CLOSED-LOOP FUEL CONTROL  
 P0128-THERMOSTAT RATIONALITY  
 P0130-1/1 O2 SENSOR HEATER RELAY MALFUNCTION  
 P0131-O2 SENSOR 1/1 CIRCUIT VOLTAGE TOO LOW  
 P0132-O2 SENSOR 1/1 CIRCUIT VOLTAGE TOO HIGH  
 P0133-O2 SENSOR 1/1 SLOW RESPONSE  
 P0134-O2 SENSOR 1/1 STAYS AT CENTER  
 P0135-O2 SENSOR 1/1 HEATER PERFORMANCE  
 P0136-O2 SENSOR 1/2 HEATER CIRCUIT MALFUNCTION  
 P0137-O2 SENSOR 1/2 CIRCUIT LOW  
 P0138-O2 SENSOR 1/2 CIRCUIT HIGH  
 P0139-O2 SENSOR 1/2 SLOW RESPONSE  
 P0140-O2 SENSOR 1/2 STAYS AT CENTER  
 P0141-O2 SENSOR 1/2 RELAY  
 P0143-O2 SENSOR 1/3 SHORTED TO GROUND  
 P0144-O2 SENSOR 1/3 SHORTED TO VOLTAGE  
 P0145-O2 SENSOR 1/3 SLOW RESPONSE  
 P0146-O2 SENSOR 1/3 STAYS AT CENTER  
 P0147-O2 SENSOR 1/3 HEATER FAILURE  
 P0148-FUEL DELIVERY ERROR  
 P0151-O2 SENSOR 2/1 CIRCUIT LOW  
 P0152-O2 SENSOR 2/1 CIRCUIT HIGH  
 P0153-O2 SENSOR 2/1 SLOW RESPONSE  
 P0154-O2 SENSOR 2/1 STAYS AT CENTER  
 P0155-O2 SENSOR 2/1 HEATER PERFORMANCE  
 P0157-O2 SENSOR 2/2 CIRCUIT VOLTAGE TOO LOW  
 P0158-O2 SENSOR 2/2 CIRCUIT VOLTAGE TOO HIGH  
 P0159-O2 SENSOR 2/2 SLOW RESPONSE  
 P0160-O2 SENSOR 2/2 STAYS AT CENTER  
 P0161-O2 SENSOR 2/2 HEATER PERFORMANCE  
 P0168-DECREASED ENGINE PERFORMANCE DUE TO HIGH INJECTION PUMP FUEL TEMPERATURE  
 P0169-WATER IN FUEL (WIF) LIGHT ON TOO LONG  
 P0171-FUEL SYSTEM 1/1 LEAN  
 P0172-FUEL SYSTEM 1/1 RICH  
 P0174-FUEL SYSTEM 2/1 LEAN  
 P0175-FUEL SYSTEM 2/1 RICH  
 P0176-LOSS OF FLEX FUEL CALIBRATION SIGNAL  
 P0177-WATER IN FUEL  
 P0178-WATER IN FUEL SENSOR VOLTAGE TOO LOW  
 P0178-FLEX FUEL SENSOR VOLTAGE TOO LOW  
 P0180-CNG TEMP SENSOR VOLTAGE FAIL  
 P0181-FUEL PUMP INJECTION PUMP FAILURE  
 P0182-CNG TEMP SENSOR VOLTAGE TOO LOW  
 P0183-CNG TEMP SENSOR VOLTAGE TOO HIGH  
 P0192-FUEL RAIL PRESSURE SENSOR VOLTAGE TOO LOW  
 P0193-FUEL RAIL PRESSURE SENSOR VOLTAGE TOO HIGH  
 P0201-INJECTOR #1 CONTROL CIRCUIT  
 P0202-INJECTOR #2 CONTROL CIRCUIT  
 P0203-INJECTOR #3 CONTROL CIRCUIT  
 P0204-INJECTOR #4 CONTROL CIRCUIT  
 P0205-INJECTOR #5 CONTROL CIRCUIT  
 P0206-INJECTOR #6 CONTROL CIRCUIT  
 P0207-FUEL INJECTOR 7 CIRCUIT  
 P0208-FUEL INJECTOR 8 CIRCUIT  
 P0209-FUEL INJECTOR 9 CIRCUIT  
 P0210-FUEL INJECTOR 10 CIRCUIT  
 P0215-FUEL INJECTOR PUMP CONTROL CIRCUIT  
 P0216-FUEL INJECTOR PUMP TIMING FAILURE  
 P0217-DECREASED ENGINE PERFORMANCE DUE TO ENGINE OVERHEAT CONDITION  
 P0219-CRANKSHAFT POSITION SENSOR OVER SPEED SIGNAL  
 P0220-APP SENSOR 2 CIRCUIT  
 P0221-APP SENSOR 2 PERFORMANCE  
 P0222-APP SENSOR 2 CIRCUIT LOW  
 P0222-IDLE VALIDATION SIGNALS BOTH LOW  
 P0223-INJECTION PULSE WIDTH ERROR (RISE TIME LONG)  
 P0223-IDLE VALIDATION SIGNALS BOTH HIGH (ABOVE 5V)  
 P0225-APP SENSOR 3 CIRCUIT  
 P0226-APP SENSOR 3 CIRCUIT PERFORMANCE  
 P0227-APP SENSOR 2 CIRCUIT LOW VOLTAGE  
 P0228-APP SENSOR 2 CIRCUIT HIGH VOLTAGE  
 P0230-TRANSFER PUMP (LIFT PUMP) CIRCUIT OUT OF RANGE  
 P0231-FUEL PUMP FEEDBACK CIRCUIT LOW VOLTAGE  
 P0232-FUEL SHUT-OFF SIGNAL VOLTAGE TOO HIGH  
 P0234-TURBOCHARGER OVERBOOST CONDITION  
 P0236-MAP SENSOR TOO HIGH TOO LONG  
 P0237-MAP SENSOR VOLTAGE TOO LOW  
 P0238-MAP SENSOR VOLTAGE TOO HIGH  
 P0243-OPEN OR SHORTED CONDITION DETECTED IN THE TURBOCHARGER WASTEGATE SOLENOID CONTROL  
 P0251-FUEL INJECTION PUMP FUEL VALVE FEEDBACK CIRCUIT  
 P0252-FUEL INJECTION PUMP FUEL VALVE STUCK  
 P0253-FUEL INJECTION PUMP FUEL VALVE OPEN CIRCUIT  
 P0254-FUEL INJECTION PUMP FUEL VALVE CURRENT TOO HIGH  
 P0263-CYLINDER 1 BALANCE SYSTEM  
 P0266-CYLINDER 2 BALANCE SYSTEM  
 P0269-CYLINDER 3 BALANCE SYSTEM  
 P0272-CYLINDER 4 BALANCE SYSTEM  
 P0275-CYLINDER 5 BALANCE SYSTEM  
 P0278-CYLINDER 6 BALANCE SYSTEM  
 P0281-CYLINDER 7 BALANCE SYSTEM  
 P0284-CYLINDER 8 BALANCE SYSTEM  
 P0300-MULTIPLE CYLINDER MISFIRE  
 P0301-CYLINDER # 1 MISFIRE  
 P0302-CYLINDER # 2 MISFIRE  
 P0303-CYLINDER # 3 MISFIRE  
 P0304-CYLINDER # 4 MISFIRE  
 P0305-CYLINDER # 5 MISFIRE  
 P0306-CYLINDER # 6 MISFIRE  
 P0307-CYLINDER #7 MISFIRE  
 P0308-CYLINDER #8 MISFIRE  
 P0309-CYLINDER #9 MISFIRE  
 P0310-CYLINDER #10 MISFIRE  
 P0320-NO CRANK REFERENCE SIGNAL AT PCM  
 P0325-KNOCK SENSOR 1 CIRCUIT  
 P0327-KNOCK SENSOR NOISE CHANNEL LOW VOLTAGE  
 P0330-KNOCK SENSOR 2 CIRCUIT  
 P0335-CRANKSHAFT POSITION SENSOR CIRCUIT  
 P0336-CRANKSHAFT POSITION (CKP) SENSOR SIGNAL  
 P0337-CRANKSHAFT POSITION (CKP) SENSOR VOLTAGE TOO LOW  
 P0338-CRANKSHAFT POSITION (CKP) SENSOR VOLTAGE TOO HIGH  
 P0339-CRANKSHAFT POSITION SENSOR INTERMITTENT  
 P0340-CAMSHAFT POSITION (CMP) LOST  
 P0341-CAMSHAFT POSITION (CMP) SENSOR SIGNAL  
 P0342-ESS VOLTAGE SUPPLY LOW  
 P0343-ESS VOLTAGE SUPPLY HIGH  
 P0350-IGNITION COIL DRAWN TOO MUCH CURRENT  
 P0351-IGNITION COIL #1 PRIMARY CIRCUIT  
 P0352-IGNITION COIL #2 PRIMARY CIRCUIT



P0353-IGNITION COIL #3 PRIMARY CIRCUIT  
P0354-IGNITION COIL #4 PRIMARY CIRCUIT  
P0355-IGNITION COIL #5 PRIMARY CIRCUIT  
P0356-IGNITION COIL #6 PRIMARY CIRCUIT  
P0357-IGNITION COIL #7 PRIMARY CIRCUIT  
P0358-IGNITION COIL #8 PRIMARY CIRCUIT  
P0370-FUEL INJECTION PUMP SPEED/POSITION SENSOR  
SIGNAL LOST  
P0380-INTAKE AIR HEATER RELAY NO.1 CONTROL CIRCUIT  
P0380-GLOW PLUG CIRCUIT PERFORMANCE  
P0381-WAIT TO START LAMP INOPERATIVE  
P0382-INTAKE AIR HEATER RELAY NO.2 CONTROL CIRCUIT  
P0387-CKP SENSOR SUPPLY VOLTAGE TOO LOW  
P0388-CKP SENSOR SUPPLY VOLTAGE TOO HIGH  
P0400-EXHAUST GAS RECIRCULATION (EGR) FLOW  
MALFUNCTION  
P0401-EGR SYSTEM PERFORMANCE  
P0403-EGR SOLENOID CIRCUIT  
P0404-EGR POSITION SENSOR RATIONALITY OPEN  
P0405-EGR POSITION SENSOR CIRCUIT LOW  
P0406-EGR POSITION SENSOR CIRCUIT HIGH  
P0410-AIR SYSTEM  
P0412-SECONDARY AIR SOLENOID CIRCUIT  
P0420-1/1 CATALYTIC CONVERTER EFFICIENCY  
P0430-1/2 CATALYTIC CONVERTER EFFICIENCY  
P0432-1/2 CATALYTIC CONVERTER EFFICIENCY  
P0440-GENERAL EVAP SYSTEM FAILURE  
P0441-EVAP PURGE FLOW MONITOR  
P0442-EVAP LEAK MONITOR MEDIUM (0.040) LEAK  
DETECTED  
P0443-EVAP PURGE SOLENOID CIRCUIT  
P0446-EVAP EMISSION VENT VALVE PERFORMANCE  
P0452-EVAP EMISSION PRESSURE SENSOR CIRCUIT LOW  
VOLTAGE  
P0453- EVAP EMISSION PRESSURE SENSOR CIRCUIT HIGH  
VOLTAGE  
P0455-EVAP LEAK MONITOR LARGE LEAK DETECTED  
P0456-EVAP LEAK MONITOR SMALL (0.020) LEAK  
DETECTED  
P0460-FUEL LEVEL SENDING UNIT NO CHANGE OVER  
MILES  
P0461-FUEL LEVEL UNIT NO CHANGE OVER TIME  
P0462-FUEL LEVEL SENDING UNIT VOLTS TOO LOW  
P0463-HIGH VOLTAGE DETECTED AT THE FUEL LEVEL  
SENSOR  
P0475-EPR SOLENOID CIRCUIT  
P0477-EXHAUST PRESSURE CONTROL RELAY LOW  
P0478- EXHAUST PRESSURE CONTROL RELAY HIGH  
P0480-COOLING FAN 1 CONTROL CIRCUIT OPEN (LOW  
SPEED FAN)  
P0483-FAN SPEED  
P0500-NO VEHICLE SPEED SENSOR SIGNAL  
P0501-VEHICLE SPEED SENSOR PERFORMANCE  
P0505-IDLE AIR CONTROL MOTOR CIRCUITS  
P0506-IDLE SPEED PERFORMANCE LOWER THAN  
EXCEPTED  
P0507-IDLE SPEED PERFORMANCE HIGHER THAN  
EXCEPTED  
P0508-UNDERCURRENT CONDITION DETECTED IN LINEAR  
IDLE AIR CONTROL MOTOR FEEDBACK SENSE  
CIRCUIT  
P0509-OVER CURRENT CONDITION DETECTED IN LINEAR  
IDLE AIR CONTROL MOTOR FEEDBACK SENSE  
CIRCUIT  
P0514-BAT TEMPERATURE SENSOR RATIONALITY  
P0516-BATTERY TEMPERATURE SENSOR CIRCUIT LOW  
P0517-BATTERY TEMPERATURE SENSOR CIRCUIT HIGH  
P0520-ENGINE OIL PRESSURE SENSOR CIRCUIT  
P0521-ENGINE OIL PRESSURE SENSOR PERFORMANCE  
P0522-OIL PRESSURE CIRCUIT LOW  
P0523-OIL PRESSURE CIRCUIT HIGH  
P0524-OIL PRESSURE TOO LOW  
P0532-A/C PRESSURE SENSOR CIRCUIT LOW  
P0533-A/C PRESSURE SENSOR CIRCUIT HIGH  
P0541-LOW VOLTAGE ON THE #1 INTAKE AIR HEATER  
RELAY  
P0542-HIGH VOLTAGE ON THE #1 INTAKE AIR HEATER  
RELAY  
P0545-A/C CLUTCH RELAY CIRCUIT  
P0551-POWER STEERING PRESSURE SWITCH FAILURE  
P0560-SYSTEM VOLTAGE  
P0562-CHARGING SYSTEM VOLTAGE TOO LOW  
P0563- CHARGING SYSTEM VOLTAGE TOO LOW  
P0567-CRUISE RESUME CIRCUIT  
P0568-CRUISE SET CIRCUIT  
P0571-CRUISE BRAKE SWITCH 1 PERFORMANCE  
P0572-BRAKE SWITCH 1 LOW  
P0573-BRAKE SWITCH 1 HIGH  
P0575-CRUISE SWITCH FAILURE (SHORTED)  
P0577-CRUISE SWITCH FAILURE (OPEN)  
P0579-SPEED CONTROL SWITCH 1 PERFORMANCE (5.7L)  
P0580-LOW VOLTAGE DETECTED AT THE SPEED CONTROL  
MULTIPLEXED SWITCH  
P0581-HIGH VOLTAGE DETECTED AT THE SPEED CONTROL  
MULTIPLEXED SWITCH  
P0600-PCM FAILURE SERIAL COMMUNICATION LINK  
P0601-PCM INTERNAL CONTROLLER FAILURE  
P0602-ECM FUELING CALIBRATION ERROR  
P0603-VCM MEMORY RESET  
P0604-ECM RAM CHECK FAILURE  
P0605-ECM ROM CHECK FAILURE  
P0606-ECM HARDWARE ERROR  
P0607-ECU INTERNAL FAILURE  
P0615-STARTER RELAY CONTROL CIRCUIT  
P0621-GENERATOR L TERMINAL CIRCUIT  
P0622-GENERATOR FIELD NOT SWITCHING PROPERLY  
P0628-FUEL PUMP RELAY CIRCUIT LOW  
P0628-LOW VOLTAGE DETECTED AT THE FUEL LIFT PUMP  
P0629-FUEL PUMP RELAY CIRCUIT HIGH  
P0629-HIGH VOLTAGE DETECTED AT THE FUEL LIFT PUMP  
P0630-VIN NOT PROGRAMMED IN PCM  
P0633-SKIM KEY NOT PROGRAMMED IN PCM  
P0642-SENSOR REFERENCE VOLTAGE 1 CIRCUIT LOW  
P0643- SENSOR REFERENCE VOLTAGE 1 CIRCUIT HIGH  
P0645-A/C CLUTCH CONTROL CIRCUIT  
P0646-LOW VOLTAGE DETECTED AT THE A/C CLUTCH  
RELAY  
P0647-HIGH VOLTAGE DETECTED AT THE A/C CLUTCH  
RELAY  
P0650-MALFUNCTION INDICATOR LAMP (MIL) CIRCUIT  
P0652-SENSOR REFERENCE VOLTAGE 2 CIRCUIT LOW  
P0653-SENSOR REFERENCE VOLTAGE 2 CIRCUIT HIGH  
P0654-ENGINE SPEED OUTPUT CIRCUIT  
P0698-SENSOR REF VOLTAGE 3 CIRCUIT LOW  
P0699- SENSOR REF VOLTAGE 3 CIRCUIT HIGH  
P0700-EATX CONTROLLER DTC PRESENT  
P0703-BRAKE SWITCH PERFORMANCE  
P0704-CLUTCH SWITCH CIRCUIT (M/T)  
P0711-TRANS TEMP SENSOR, NO TEMP RISE AFTER START  
P0712-TRANS TEMP SENSOR TOO LOW  
P0713-TRANS TEMP SENSOR TOO HIGH  
P0720-LOW OUTPUT SPEED SENSOR RPM, ABOVE 15MPH  
P0740-TORQUE CONVERTER CLUTCH, NO RPM DROP AT  
LOCKUP  
P0743-TORQUE CONVERTER CLUTCH SOLENOID/TRANS  
RELAY CIRCUIT  
P0748-GOVERNOR PRESSURE SOL CONTROL/TRANS  
RELAY CIRCUIT  
P0751-O/D SWITCH PRESSED (LOW) MORE THAN 5  
MINUTES  
P0753-TRANS 3-4 SHIFT SOL/TRANS RELAY CIRCUIT  
P0756-AW4 SHIFT SOL B (2-3) FUNCTIONAL FAILURE  
P0783-(3-4) SHIFT SOL, NO RPM DROP AT LOCKUP  
P0801-REVERSE GEAR LOCKOUT CIRCUIT OPEN OR  
SHORTED  
P0830-CLUTCH DEPRESSED SWITCH CIRCUIT  
P0833-CLUTCH RELEASED SWITCH CIRCUIT  
P0837-4WD SWITCH PERFORMANCE  
P0838-4WD SWITCH CIRCUIT LOW  
P0839-4WD SWITCH CIRCUIT HIGH  
P1000-IGNITION CIRCUIT LOW  
P1001-IGNITION CIRCUIT HIGH  
P1004-ECU BATTERY FEED & POWER GROUNDS  
P1005-SYSTEM GROUND CIRCUIT  
P1006-EGR/EVAP SOLENOID CIRCUIT LOW  
P1007-EGR/EVAP SOLENOID CIRCUIT HIGH

P1008-POWER STEERING CIRCUIT LOW  
 P1009-POWER STEERING CIRCUIT HIGH  
 P1012-MPA CIRCUIT LOW  
 P1013-MPA CIRCUIT HIGH  
 P1014-FUEL PUMP CIRCUIT LOW  
 P1015-FUEL PUMP CIRCUIT HIGH  
 P1016-CHARGE AIR TEMPERATURE CIRCUIT LOW  
 P1017-CHARGE AIR TEMPERATURE CIRCUIT HIGH  
 P1018-SERIAL DATA CIRCUIT  
 P1019-POWER LATCH NOT SET  
 P1021-ENGINE FAILED TO START DUE TO MECHANICAL,  
 FUEL OR IGNITION CONDITIONS  
 P1022-STARTER RELAY CIRCUIT LOW  
 P1024-ECU START CIRCUIT LOW  
 P1025-WOT CIRCUIT LOW  
 P1026-WOT CIRCUIT HIGH  
 P1027-ECU SEES WIDE OPEN THROTTLE  
 P1028-ECU DOES NOT SEE WIDE OPEN THROTTLE  
 P1029-ISA CLOSED THROTTLE CIRCUIT LOW  
 P1030-ISA CLOSED THROTTLE CIRCUIT HIGH  
 P1031-ECU SEES CLOSED THROTTLE  
 P1032-ECU DOES NOT SEES CLOSED THROTTLE  
 P1033-.36-ISA CIRCUIT  
 P1037-TP SENSOR CIRCUIT READS LOW  
 P1038-PARK/NEUTRAL LINE HIGH  
 P1039- PARK/NEUTRAL LINE LOW  
 P1040-LATCHED B+ LINE LOW  
 P1041-LATCHED B+ LINE HIGH  
 P1042-NO LATCHED B+ ½ VOLT DROP  
 P1043-SHIFT LAMP CIRCUIT GROUNDED  
 P1044-D2-1 CIRCUIT LOW (A/T)  
 P1044-UPSHIFT LAMP CIRCUIT (M/T)  
 P1044-SHIFT LAMP CIRCUIT HIGH  
 P1045-SHIFT LAMP CIRCUIT OPEN  
 P1047-WRONG ECU  
 P1048-M/T VEHICLE CONFIGURATION  
 P1049-A/T VEHICLE CONFIGURATION  
 P1050-IDLE RPM LOW  
 P1051-IDLE RPM HIGH  
 P1052-MAP SENSOR OUT OF LIMITS  
 P1053-CHANGE IN MAP READING OUT OF LIMITS  
 P1054-COOLANT SENSOR & 5V SUPPLY FOR TP SENSOR /  
 MAP CIRCUIT LOW  
 P1055-COOLANT SENSOR CIRCUIT HIGH  
 P1065-INACTIVE COOLANT TEMPERATURE SENSOR  
 P1059-A/C REQUEST CIRCUIT LOW  
 P1060-A/C REQUEST CIRCUIT HIGH  
 P1061-A/C SELECT CIRCUIT LOW  
 P1062-A/C SELECT CIRCUIT HIGH  
 P1063-A/C CLUTCH CIRCUIT LOW  
 P1064-A/C CLUTCH CIRCUIT HIGH & POWER STEERING  
 INPUT  
 P1065-RICH OXYGEN SENSOR INPUT  
 P1066-LEAN OXYGEN SENSOR INPUT  
 P1067-LATCH RELAY CIRCUIT LOW  
 P1068-LATCH RELAY CIRCUIT HIGH  
 P1069-NO TACH  
 P1074-ECU DOES NOT SEE SPEED SENSOR  
 P1106-MAP SENSOR CIRCUIT INTERMITTENT HIGH  
 VOLTAGE  
 P1107-MAP SENSOR CIRCUIT INTERMITTENT LOW  
 VOLTAGE  
 P1110-DECREASED ENGINE PERFORMANCE DUE TO HIGH  
 INTAKE AIR TEMPERATURE  
 P1111-IAT SENSOR CIRCUIT INTERMITTENT HIGH VOLTAGE  
 P1111-IAT SENSOR CIRCUIT INTERMITTENT LOW VOLTAGE  
 P1114-ECT SENSOR CIRCUIT INTERMITTENT LOW VOLTAGE  
 P1115-ECT SENSOR CIRCUIT INTERMITTENT HIGH  
 VOLTAGE  
 P1121-TPS CIRCUIT INTERMITTENT HIGH VOLTAGE  
 P1122-TPS CIRCUIT INTERMITTENT HIGH VOLTAGE  
 P1125-ACCELERATOR PEDAL POSITION SYSTEM  
 P1133-HO2S INSUFFICIENT SWITCHING BANK 1 SENSOR 1  
 P1134-HO2S INSUFFICIENT TRANSITION TIME RATIO BANK  
 1 SENSOR 1  
 P1153-HO2S INSUFFICIENT SWITCHING BANK 2 SENSOR 1  
 P1154-HO2S INSUFFICIENT TRANSITION TIME RATIO BANK  
 2 SENSOR 1  
 P1180-DECREASED ENGINE PERFORMANCE DUE TO HIGH  
 INJECTION PUMP FUEL TEMPERATURE  
 P1191-INTAKE AIR DUCT LEAK  
 P1192-INLET AIR TEMP SENSOR VOLTAGE LOW  
 P1193-INLET AIR TEMP SENSOR VOLTAGE HIGH  
 P1194-O2 HEATER PERFORMANCE  
 P1195-O2 SENSOR 1/1 SLOW DURING CATALYST MONITOR  
 P1196-O2 SENSOR 2/1 SLOW DURING CATALYST MONITOR  
 P1197- O2 SENSOR 1/2 SLOW DURING CATALYST MONITOR  
 P1198-RADIATOR TEMPERATURE SENSOR VOLTS TOO  
 HIGH  
 P1198-RADIATOR TEMPERATURE SENSOR VOLTS TOO  
 LOW  
 P1214-INJECTION PUMP TIMING OFFSET  
 P1216-FUEL SOLENOID RESPONSE TIME TOO SHORT  
 P1217-FUEL SOLENOID RESPONSE TIME TOO LONG  
 P1218-INJECTION PUMP CALIBRATION CIRCUIT  
 P1271-ACCELERATOR PEDAL POSITION SENSOR 1-2  
 CORRELATION  
 P1272- ACCELERATOR PEDAL POSITION SENSOR 2-3  
 CORRELATION  
 P1273- ACCELERATOR PEDAL POSITION SENSOR 1-3  
 CORRELATION  
 P1275-ACCELERATOR PEDAL POSITION SENSOR 1 CIRCUIT  
 P1277-ACCELERATOR PEDAL POSITION SENSOR 1 LOW  
 VOLTAGE  
 P1278-ACCELERATOR PEDAL POSITION SENSOR 1 HIGH  
 VOLTAGE  
 P1280-ACCELATOR PEDAL POSITION SENSOR 2 CIRCUIT  
 P1281-ENGINE IS COLD TOO LONG  
 P1282-FUEL PUMP/SYSTEM RELAY CONTROL CIRCUIT  
 P1282-ACCELERATOR PEDAL POSITION SENSOR 2 LOW  
 VOLTAGE  
 P1283-IDLE SELECT SIGNAL INVALID  
 P1283-ACCELERATOR PEDAL POSITION SENSOR 2 HIGH  
 VOLTAGE  
 P1284-FUEL INJECTION PUMP BATTERY VOLTAGE OUT OF  
 RANGE  
 P1285-FUEL INJECTION PUMP CONTROLLER ALWAYS ON  
 P1285-ACCELERATOR PEDAL POSITION SENSOR 3 CIRCUIT  
 P1286-ACCELERATOR POSITION SENSOR SUPPLY  
 VOLTAGE TOO HIGH  
 P1287-FUEL INJECTION PUMP CONTROL SUPPLY VOLTAGE  
 LOW  
 P1287-ACCELERATOR PEDAL POSITION SENSOR 3 LOW  
 VOLTAGE  
 P1288-INTAKE MANIFOLD SHORT RUNNER SOLENOID  
 CIRCUIT  
 P1288-ACCELERATOR PEDAL POSITION SENSOR 3 LOW  
 VOLTAGE  
 P1289-MANIFOLD TUNE VALVE SOLENOID CIRCUIT  
 P1290-CNG FUEL SYSTEM PRESSURE TOO HIGH  
 P1291-NO TEMP RISE SEEN FROM INTAKE HEATERS  
 P1292-CNG PRESSURE SENSOR VOLTAGE TOO HIGH  
 P1293-CNG PRESSURE SENSOR VOLTAGE TOO LOW  
 P1294-TARGET IDLE NOT REACHED  
 P1295-NO 5-VOLTS TO THROTTLE POSITION SENSOR  
 P1296-NO 5-VOLTS TO MAP SENSOR  
 P1297-NO CHANGE IN MAP FROM START TO RUN  
 P1298-LEAN OPERATION AT WIDE OPEN THROTTLE  
 P1299-VACUUM LEAK FOUND (IAC FULLY SEATED)  
 P1336-CRANKSHAFT POSITION SYSTEM VARIATION NOT  
 LEARNED  
 P1345-CRANKSHAFT POSITION/CAMSHAFT POSITION  
 CORRELATION  
 P1351-IGNITION CONTROL CIRCUIT HIGH VOLTAGE  
 P1361-IGNITION CONTROL CIRCUIT LOW VOLTAGE  
 P1380-ELECTRONIC BRAKE CONTROL ROUGH ROAD DATA  
 UNUSABLE  
 P1381-MISFIRE DETECTED-NO ELECTRONIC BRAKE  
 CONTROL DATA  
 P1388-AUTO SHUTDOWN RELAY CONTROL CIRCUIT  
 P1389-NO ASD RELAY OUTPUT VOLTAGE AT PCM  
 P1390-TIMING BELT SKIPPED 1 TOOTH OR MORE  
 P1391-INTERMITTENT LOSS OF CMP OR CKP  
 P1398-MIS-FIRE ADAPTIVE NUMERATOR AT LIMIT  
 P1399-WAIT TO START LAMP CIRCUIT

P1403-NO 5 VOLTS TO EGR SENSOR  
 P1404-EGR VALVE CLOSED PINTLE POSITION  
 P1406-EGR VALVE POSITION  
 P1409-EGR VALVE SYSTEM LEAK  
 P1415-AIR SYSTEM BANK 1  
 P1416-AIR SYSTEM BANK 1  
 P1441-EVAP EMISSION FLOW DURING NON-PURGE  
 P1475-AUXILIARY 5 VOLT SUPPLY VOLTAGE HIGH  
 P1476-TOO LITTLE SECONDARY AIR  
 P1477-TOO MUCH SECONDARY AIR  
 P1478-BATTERY TEMP SENSOR VOLTS OUT OF LIMITS  
 P1479-TRANSMISSION FAN RELAY CIRCUIT  
 P1480-PCV SOLENOID CIRCUIT  
 P1481-EATX MISFIRE RPM SIGNAL OUT OF RANGE  
 P1482-CATALYST TEMPERATURE SENSOR CIRCUIT SHORTED LOW  
 P1483-CATALYST TEMPERATURE SENSOR CIRCUIT SHORTED HIGH  
 P1484-CATALYTIC CONVERTER OVERHEAT DETECTION  
 P1485-AIR INJECTION SOLENOID CIRCUIT  
 P1486-EVAP LEAK MONITOR PINCHED HOSE FOUND  
 P1487-HIGH SPEED RADIATION FAN CTRL RELAY CIRCUIT  
 P1488-AUXILIARY 5 VOLT SUPPLY OUTPUT TOO LOW  
 P1489-HIGH SPEED FAN CTRL RELAY CIRCUIT  
 P1490-LOW SPEED FAN CTRL RELAY CIRCUIT  
 P1491-RADIATOR FAN CONTROL RELAY CIRCUIT  
 P1492-AMBIENT/BATTERY TEMPERATURE SENSOR VOLTAGE TOO HIGH  
 P1493-AMBIENT/BATTERY TEMPERATURE SENSOR VOLTAGE TOO LOW  
 P1494-LEAK DETECTION PUMP SWITCH OR MECHANICAL FAULT  
 P1495-LEAK DETECTION PUMP SOLENOID CIRCUIT  
 P1496-5 VOLT SUPPLY, OUTPUT TOO LOW  
 P1498-HIGH SPEED RADIATOR FAN GROUND DTRL RELAY CIRCUIT  
 P1508-IAC SYSTEM LOW RPM  
 P1509-IAC SYSTEM HIGH RPM  
 P1594-CHARGING SYSTEM VOLTAGE TOO HIGH  
 P1595-SPEED CONTROL SOLENOID CIRCUIT  
 P1596-SPEED CONTROL SWITCH ALWAYS HIGH  
 P1597-SPEED CONTROL SWITCH ALWAYS LOW  
 P1598-A/C PRESSURE SENSOR VOLTAGE TOO HIGH  
 P1599-A/C PRESSURE SENSOR VOLTAGE TOO LOW  
 P1602-PCM NOT PROGRAMMED  
 P1621-PCM MEMORY PERFORMANCE OR WRITE  
 P1626-VEHICLE THEFT SYSTEM CONTROL LOSS OF DATA  
 P1627-A/D PERFORMANCE  
 P1630-VEHICLE THEFT SYSTEM PCM IN LEARNING MODE  
 P1631-VEHICLE THEFT SYSTEM IMPROPER PASSWORD  
 P1635-5 VOLT REFERENCE (A) CIRCUIT  
 P1639-5 VOLT REFERENCE (B) CIRCUIT  
 P1641-MIL CONTROL CIRCUIT  
 P1643-WAIT TO START LAMP CONTROL CIRCUIT  
 P1646-5 VOLT REFERENCE (C) CIRCUIT  
 P1652-J1850 SHORT TO GROUND  
 P1653-EGR VENT SOLENOID CONTROL CIRCUIT  
 P1654-SERVICE THROTTLE SOON LAMP CONTROL CIRCUIT  
 P1655-EGR SOLENOID CONTROL CIRCUIT  
 P1656-WASTEGATE SOLENOID CONTROL CIRCUIT  
 P1680-CLUTCH RELEASED SWITCH CIRCUIT  
 P1681-NO I/P CLUSTER CCD/J1850 MESSAGES RECEIVED  
 P1682-CHARGING SYSTEM VOLTAGE TOO LOW  
 P1683-SPEED CONTROL POWER RELAY  
 P1683-S/C 12V DRIVER CKT  
 P1684-BATTERY DISCONNECTED IN THE LAST 50 STARTS  
 P1685-SKIM INVALID KEY  
 P1686-NO SKIM BUS MESSAGES RECEIVED  
 P1687-NO CLUSTER BUS MESSAGE  
 P1688-INTERNAL FUEL INJECTION PUMP CONTROLLER FAILURE  
 P1689-NO COMM BETWEEN ECM & INJECTION PUMP MODULE  
 P1690-CKP SENSOR DOES NOT AGREE WITH ECM CKP SENSOR  
 P1691-FUEL SYSTEM ESS RPM ERROR  
 P1692-DTC SET IN ECM  
 P1693-DTC CLEARED IN COMPANION JTEC MODULE  
 P1694-NO BUS MESSAGES RECEIVED FROM ECM MODULE  
 P1695-NO CCD/J1850 MESSAGE FROM BODY CONTROL MODULE  
 P1696-PCM FAILURE EEPROM WRITE DENIED  
 P1697-EMR (SRI) MILEAGE NOT STORED  
 P1698-NO CCD/J1850 MESSAGE FROM TCM/PCM  
 P1719-SKIP SHIFT SOLENOID CIRCUIT  
 P1740-TCC OR O/D SOLENOID PERFORMANCE  
 P1756-GOV PRESS NOT EQUAL TO TARGET @ NOT 12-20 PSI  
 P1757-GOV PRESS ABOVE 3 PSI IN GEAR WITH 0 MPH  
 P1762-GOV PRESS SENSOR OFFSET VOLTS TOO LOW OR HIGH  
 P1763-GOV PRESS SENSOR VOLTS TOO HIGH  
 P1764-GOV PRESS SENSOR VOLTS TOO LOW  
 P1765-TRANS 12V SUPPLY RELAY CTRL CIRCUIT  
 P1899-P/N SWITCH STUCK IN PARK OR IN GEAR  
 P2121-PEDAL POSITION SENSOR 1 CONFORMANCE ERROR  
 P2122-PEDAL POSITION SENSOR 1 VOLTAGE TOO LOW  
 P2123-PEDAL POSITION SENSOR 1 VOLTAGE TOO HIGH  
 P2127-PEDAL POSITION VALIDATION SWITCH 2 LOW  
 P2128-PEDAL POSITION VALIDATION SWITCH 2 LOW  
 P2146-FUEL INJECTOR GROUP 1 SUPPLY VOLTAGE CIRCUIT  
 P2147-FUEL INJECTOR GROUP 1 SUPPLY VOLTAGE LOW  
 P2148-FUEL INJECTOR GROUP 1 SUPPLY VOLTAGE HIGH  
 P2149-FUEL INJECTOR GROUP 2 SUPPLY VOLTAGE CIRCUIT  
 P2150-FUEL INJECTOR GROUP 2 SUPPLY VOLTAGE LOW  
 P2151-FUEL INJECTOR GROUP 2 SUPPLY VOLTAGE HIGH  
 P2266-WATER IN FUEL (WIF) SENSOR VOLTAGE TOO LOW  
 P2269-WATER IN FUEL (WIF)  
 P2502-CHARGING SYSTEM ERROR  
 P2503-CHARGING SYSTEM OUTPUT LOW  
 P2504-CHARGING SYSTEM OUTPUT HIGH  
 P2509-ECM/PCM POWER INPUT SIGNAL INTERMITTENT  
 P2607-LOW VOLTAGE AT THE #2 INTAKE AIR HEATER RELAY  
 P2608-HIGH VOLTAGE AT THE #2 INTAKE AIR HEATER RELAY  
 P2609-NO VOLTAGE DROP SEEN FROM INTAKE AIR HEAT

## 10. Warranty

### *How Do You Get Service?*

If something goes wrong with your Product during the warranty period, use the following procedure to return the Product to MAD Electronics

1. Restore the STOCK software to your vehicle
2. Fill-in the Assistance Request Module present in MADS internet site or send an e-mail to MADS (the e-mail addresses is indicated on the internet site).

Please report the following information:

- data (possibly the electronic copy) of your sales receipt. The sales receipt must be from the location where you purchased your Product and must include the name of the business where you purchased the Product and the address of such business.
  - Serial number of the product
  - A brief written description of the problem
  - Your address and other personal information to contact you
3. Contact your nearest MADS distributor for immediate assistance bringing a copy of the Assistance Request Module.

## 11. Declaration of Conformity

### For customers in North America



Model number:	Smarty S-03
Trade Name:	MADS
Responsible Party:	MADS s.r.l.
Address:	via Lino Lovo, 88 – 37050 Oppeano (Verona) – ITALY
e-mail:	<a href="mailto:admin@madselectronics.com">admin@madselectronics.com</a>

Tested to Comply With FCC Standards  
FOR HOME OR OFFICE USE

The device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation

### For customers in Europe



“CE” Mark indicates that this product complies with the European requirements for safety, health, environment and customer protection.